

Fire Doors



Accreditations


















Certification Options						
	FD30	Tested for cold smoke leakage	Certifre	Certisecure	SBD accredited	
Single Certification	>	\	CF 5906	-	-	
Dual Certification	>	>	CF 5863	CS 5112	>	

Certificates can be downloaded from warringtonfire.com

Door Set Styles

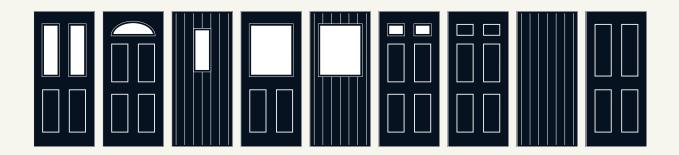

Door Set Colours

Internal & External Combinations Available



Furniture Colours





Chrome

Lock and Cylinder



UAP Kinetica 3H BSi Kitemarked Euro Cylinder



GU Multipoint Lock

Glass Options




Clear



Stippolyte

Door Sizes

Door Width Sizes

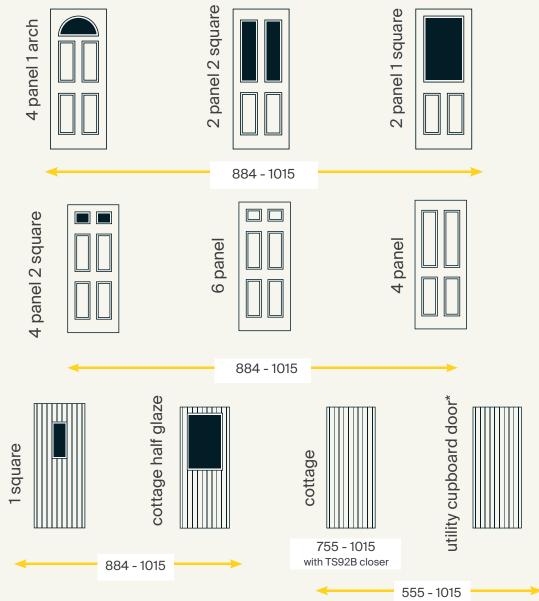

Door Set Sizes

	Min Height	Max Height
Doorset Only	1971	2079
Including Toplight (Min 212 - Max 421)	2181	2500

*Utility Cupboard Door is supplied without door closer and with "Fire Door Keep Locked" signage. All measurements in millimetres

Closers

The Value Doors & Windows fire door set is available with two options of surface-mounted door closers. The TS72 closer can be fitted on the internal face of the door only, and the TS92 slide arm closer is suitable to be fitted to the internal or external face of the doorset. Both closers are available in gold and chrome finish and the fixing positions are pilot drilled for installation on site.



Also available in Gold

Dorma TS72Surface Mounted

- Rack and pinion v-arm closer
- ✓ Surface mounted on internal face of doorset
- ✓ Variable closing force EN 2-4
- Tested and CE marked to EN 1154
- Third party certificated by Certifire under CF 268

Dorma TS92

Surface Mounted

- Cam action, slide arm closer
- Surface mounted on internal or external face of doorset
- ✓ Variable closing force EN 1-4
- ✓ Tested and CE marked to EN 1154
- √Third party certificated by Certifire under CF 119



Specification Overview

Single Certification

Dual Certification

FD30S Fire doorset tested to BS 476: Part 22 or BS EN 1634-1:2014

Certificated to BS 476: Part 22 by Warringtonfire Certifire scheme. Certificate number CF 5906.

Tested for cold smoke leakage to BS EN 1634-3

Capable of meeting Approved Document Q (Part Q), Security - Dwellings.

FD30S Fire and Security doorset tested to BS 476: Part 22 or BS EN 1634-1:2014

Certificated to BS 476: Part 22 and PAS 24:2016 by Warringtonfire Certifire and Certisecure

schemes. Certificate numbers CS 5112 / CF 5863 Tested for cold smoke leakage to BS EN 1634-3

Accredited by Secured by Design

Integrity/Insulation

DSI fire doorsets are certificated for 30 minutes fire integrity and only suitable for use when fire insulation is required if the doorset has less than 20% of un-insulating glass, including any toplight.

Frame
Timber hybrid frame. Low maintenance UPVC outer skin with sustainable sourced timber core reinforcement providing structural stability for all leav compostments.

forcement providing structural stability for all key comportments.

Toplight Construction Four sided frame with dedicated hardwood coupler

Threshold Option Low threshold in aluminum for accessibility

Locking Mechanism GU Multipoint slam lock with intumescent protection

Cylinder

UAP Kinetica Euro Cylinder
BSi 3* Kitemarked

Glazed Apertures

Insulated glass unit, argon filled with 7 mm Pilkington Pyrodur and 6.8 mm thick Pilkington K Clear

laminated glass or Pilkington K P1A Stippolyte glass.

Glazing Cassette Colour matched cassette

Certifire approved TS008 letterplate with security cowl.

Eyeviewer available at low and high height for wheelchair accessibility.

Trojan Surface mounted knocker.

Tulbus update in cold/observe.

Trojan Surface mounted knocker.
Fully suited in gold/chrome.
Trojan surface mounted urn knocker.
Fully suited in gold or chrome

Handle Type

Lever/Lever Solid Spindle

Hinge Type 3 x Grade 13, CE marked stainless steel butt hinges in chrome with intumescent protection.

Closer Certifire approved surface closers, Dorma TS72V arm closer and Dorma TS92 slide arm closer.

Pilot holes prepared for installation on site.

SINGLE CERTIFICATED

DUAL CERTIFICATED



Fire Door Certification invalid unless installed and maintained exactly in accordance with Manufacturer's instructions and this label is retained unmarked and not removed.





Fire Door Certification invalid unless installed and maintained exactly in accordance with Manufacturer's instructions and this label is retained unmarked and not removed.





Dual scope fire and security certification invalid unless installed and maintained exactly in accordance with the manufacturer's instructions and this label is retained unmarked and not removed.

